
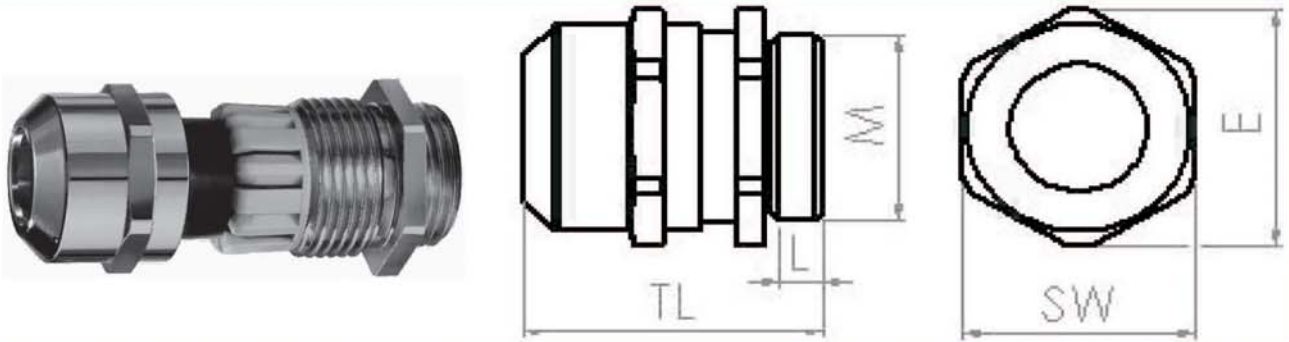


EMSKV EMV Z 16 BLACK CR

DATA SHEET

Product	SPRINT cable gland with metric connection thread acc. to EN 60423 and earthing inserts according to DIN 89345, optional with locknut
Approvals	
Material	Fitting and cap nut: Brass Nickel Black Chromium Plated Clamping Cage: Polyamide Frianyl A63 V2 (UL file E86034) Earthing Insert: Brass CuZn39Pb3, Chromium plated Gaskets: EPDM; (70+5) Shore A
Colour	Fitting and cap nut: Acc. to surface finish Clamping Cage: all
Protection Spec.	Liquid-tight; IP 68 to 5 bar (30 min)
Chemical Resistance to	acetone, benzene, benzene, diesel oil, oils and greases, paint and varnish solvents
Temperature range	EN 50262: -20°C to 100°C, intermittent up to approx 120°C UL/UR; -20°C to 60°C
Flame Protection	Glow wire test 750°C acc. to EN 60695-2-11, flame class V-2 acc. to UL 94



TYPE	Connection thread size M	Anchorage range = sealing range acc. to EN 50262	Type of cable anchorage acc. to EN 50262	[mm] Anchorage range = sealing range acc. to UR	[N] Force of cable anchorage acc. to UR	[Nm] Installation torques fitting	[Nm] Installation torques cap nut	Impact category acc. to EN 50262	[mm] Total length TL	[mm] Screw-in thread length L	[mm] Key width SW	[mm] Collar diameter E
EMSKV 16 EMV-Z	M16x1,5	4,5 - 10	A	6,0 - 8,6	30	4,0	4,0	6	26 - 34	5	20	22

DELTRON Components 

sales@dem-uk.com
Tel: +44 (0) 1724 273200
www.dem-uk.com