


PRODUCT RANGE (RATINGS @ 85°C)				
TYPE	CONTINUOUS		TRANSIENT	
	RMS VOLTAGE (VOLTS)	DC VOLTAGE (VOLTS)	ENERGY (10/1000µs) (JOULES)	PEAK CURRENT (8/20µs) (AMPS)
DVS24	30	38	8.8	1000
DVS48	60	81	20	4500
DVS110	150	200	80	4500
DVS240	275	350	190	6500


SPECIFICATION

LINE FREQUENCY 50/60 Hz
 TEMPERATURE RANGE -25C TO +85C
 WIRE GUAGE 12 AWG
 MOUNTING EN 50 022 RAIL (TOP HAT)
 SCREW TERMINALS 2.5sq.mm (12 AWG)

ELECTRICAL CONNECTION



EXAMPLE

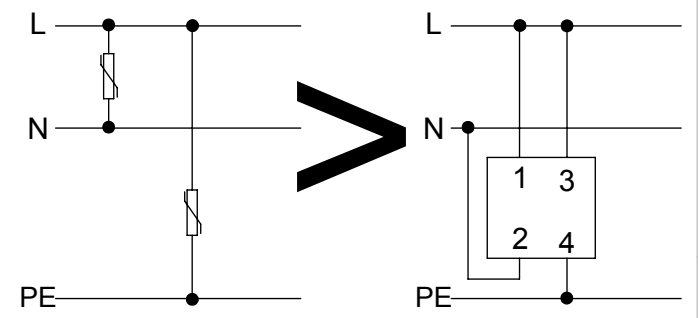

Tel No. +44(0)1724 273200 Website www.dem-uk.com



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALPHA 3 MANUFACTURING.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ALPHA 3 MANUFACTURING IS PROHIBITED.

DEM Manufacturing, Deltron Emcon House
 Hargreaves Way, Sawcliffe Ind. Park,
 Scunthorpe, North Lincolnshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETRES
 LINEAR TOLERANCE:
NO DECIMAL PLACES ±0.5mm
1 DECIMAL PLACE ±0.25mm
2 DECIMAL PLACES ±0.125mm
 ANGULAR TOLERANCE: ±1°

FINISH -
 DEBURR AND BREAK SHARP EDGES -
 IF IN DOUBT ASK
 DO NOT SCALE DRAWING
 MATERIAL -

DRAWN BY -
 APPROVED BY -
 THIRD ANGLE PROJECTION
 SHEET 1 OF 1
 SCALE 1:1
 A4

TITLE **GENERAL SPECIFICATION FOR DVS**
24 / 48 / 110 / 240
 DRAWING NO. **DVS**
 ISSUE **04**
 Release