


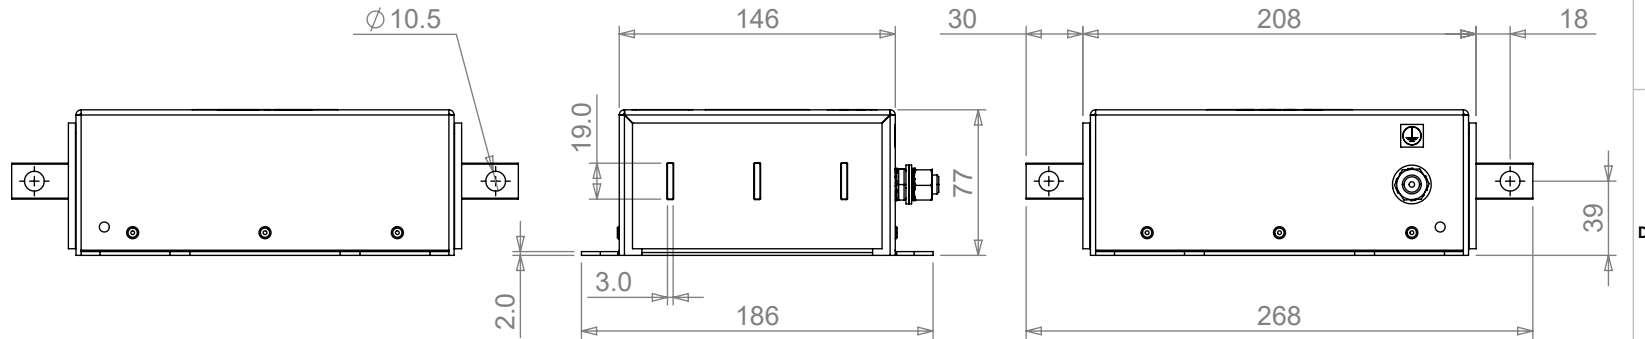
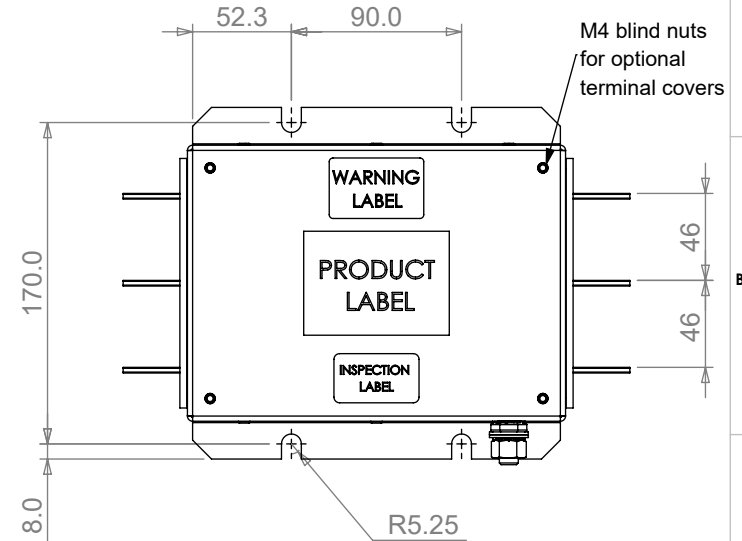


<b>KMF3320A</b>	
<b>AKA</b>	KMF3290A
<b>Device</b>	rfi filter
<b>Current</b>	320A 50°C
<b>Earthing</b>	M10x25 stud 20Nm
<b>Enclosure</b>	aluminium 2mm
<b>Loss</b>	13.3W/ph
<b>Leakage</b>	5.8mA operating
<b>Mass</b>	4.2kg
<b>Mounting</b>	M10 20Nm
<b>PCB</b>	n/a
<b>Potting</b>	resin
<b>Power</b>	240.8kW (69.6kW)
<b>Protection</b>	IP00
<b>Resistance</b>	110uR/ph
<b>Residual</b>	560V 5s
<b>SCCR</b>	200kA when fused
<b>Style</b>	busbar filter
<b>Terminal</b>	bar 19x3mm M10x20mm 20Nm
<b>Varistor</b>	n/a
<b>Supply</b>	3P 480V 50/60Hz
<b>Voltage</b>	528V (460V IT) max
<b>Withstand</b>	2900Vdc 60s
<b>Altitude</b>	2000m w/out derating
<b>Bonding</b>	25A 50/60Hz
<b>Class</b>	class I
<b>Environment</b>	-25/+85/21
<b>Flammability</b>	UL94 V-2 min
<b>Humidity</b>	93% RH non-condensing
<b>Insulation</b>	500Vdc ≥3.5MR
<b>Material</b>	group IIIb
<b>MTBF</b>	22yrs (MIL-HDBK-217F)
<b>Overload</b>	135% 2hrs 150% 60s
<b>Overvoltage</b>	category II (typ. 2.5/5kV)
<b>Packaging</b>	ASTM D7386
<b>Pollution</b>	degree II
<b>Shock</b>	15g 11ms
<b>Spacing</b>	≥50mm from ventilated surfaces
<b>Vibration</b>	5-55Hz 350um 55-500Hz 2G
<b>EU</b>	CE EN60939
<b>US</b>	uR UL1283
<b>CAN</b>	cUR CSA22.2
<b>OTHER</b>	n/a

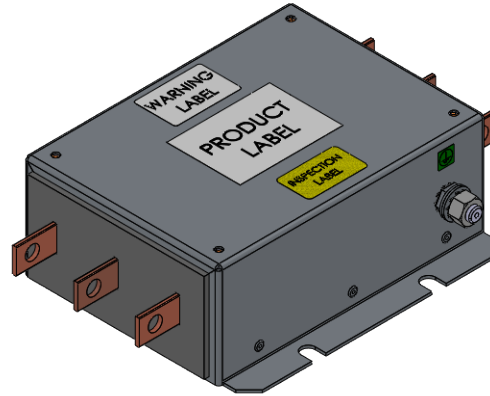

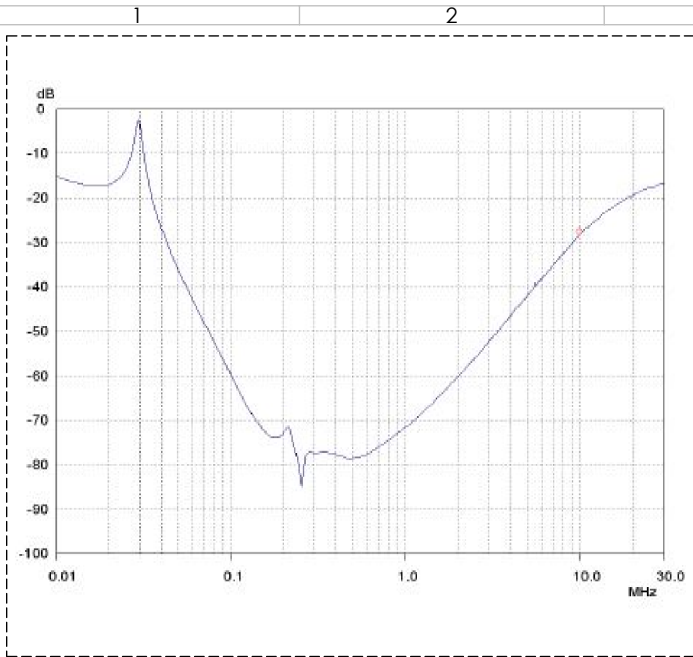

A1: 50/50Ω ASYMMETRICAL (COMMON)

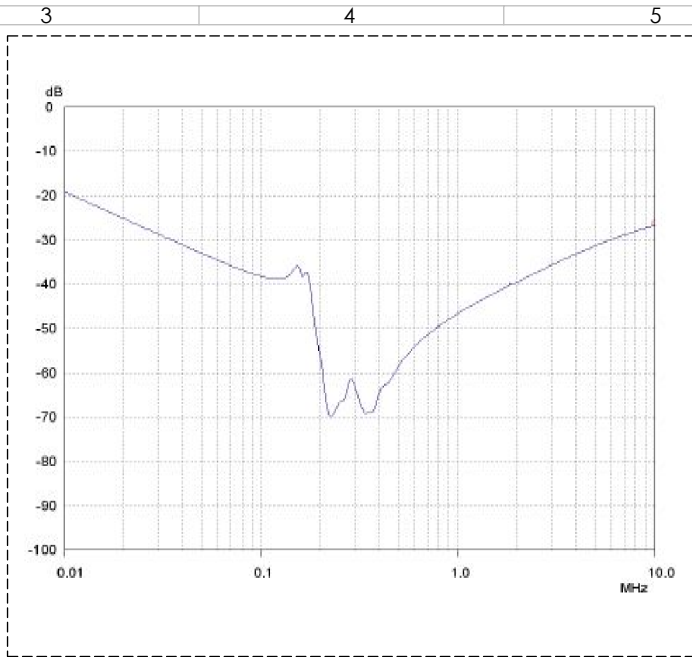

A2: 50/50Ω SYMMETRICAL (DIFFERENTIAL)



B: 50/50Ω ASYMMETRICAL (COMMON) LINE Y-CAP/CLIP REMOVED



C: 50/50Ω ASYMMETRICAL (COMMON) LOAD Y-CAP/CLIP REMOVED



D: 50/50Ω ASYMMETRICAL (COMMON) Y-CAPS/CLIPS REMOVED